

- Wall mounting
- Rectangular
- PVC
- Grey, RAL 7015



PVC backdraught shutters type VK-A

Backdraught shutters for surface mounting with aluminium frame and PVC blades

Application

- For air exhaust in any type of installation.
- The blades will open when the shutter is exposed to overpressure. Pressure of 20 Pa for air speed of 2m/s, 25 Pa for air speed of 3m/s, and 30 Pa for airspeed of 4m/s

Material

- Aluminium and PVC combination

Mounting

- Mounted by invisible screws behind the blades

Accessories

- Screws (included)

Text for tender

- The air exhaust shall be effectuated through backdraught shutters, surface mounted with PVC blades and solid aluminium frame. The blades will open at a pressure of 20 Pa for air speed of 2m/s, 25 Pa for air speed of 3m/s, and 30 Pa for airspeed of 4m/s
- Finish RAL 7015
- ATC Type **VK-A**


Order example

- **VK-A 310 X 310**

Explanation

VK-A = Type grill

240 X 240 = Exterior size grill

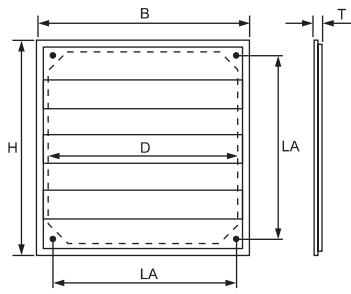

Dimensions			
VK-A	H/B [mm]	LA [mm]	T [mm]
310/310	310	250	27
360/360	360	295	27
410/410	410	329	27
450/450	450	382	27
500/500	505	432	27
560/560	560	477	27
610/610	610	522	28
690/690	690	626	31